


Champion's Choice, Inc.
LaVergne, Tennessee

Hammerli X-esse Scope Mount Instructions

Step 1 – Remove Magazine from pistol, ensure that the pistol is empty.

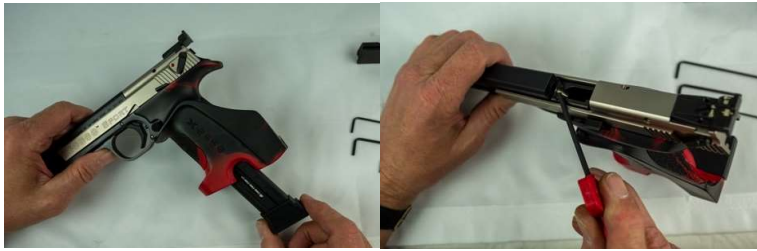

Step 2 – Remove dovetail cover by loosening the screw with 3mm allen wrench.




Step 3 – Loosen front sight retaining screw with 1.5mm allen wrench and remove front sight post.



Step 4 – Install scope mount recoil lug into front sight post hole and tighten front sight retaining screw.

*****Do Not Over Tighten*****

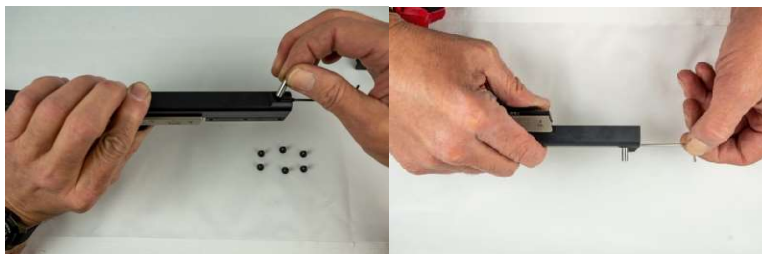

Step 5 – Slide scope mount dovetail adapter into dovetail on pistol.



Step 6 – Slide scope mount down onto recoil lug and install the scope mount screws.

*****Use of blue Loc-Tite on screws is recommended*****



Step 7 – Tighten dovetail adaptor screws. Scope mount is now installed.



Scope mount is now installed.



Check out our instructional video for installation tips on our website ChampChoice.com